


ULTRASONIC ENERGY METER

Flow & Temperature Monitoring Capability, Modbus® & BACnet Communication




TUF-150/400

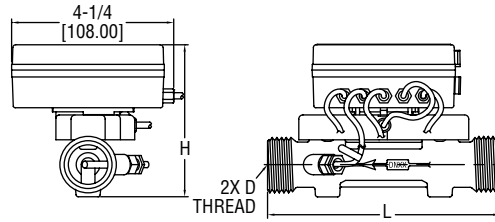

DIMENSIONS in [mm]			
Model	L	D	H
TUF-150-XX	4-21/64 [110.00]	G3/4B	3-31/32 [101.00]
TUF-200-XX	5-1/8 [130.00]	G1B	3-31/32 [101.00]
TUF-250-XX	6-19/64 [160.00]	G11/4B	4-11/64 [106.00]
TUF-320-XX	7-3/32 [180.00]	G11/2B	4-29/64 [113.00]
TUF-400-XX	7-7/8 [200.00]	G2B	4-49/64 [121.00]



TUF-500

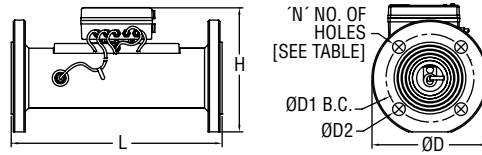

DIMENSIONS in [mm]						
Model	L	ØD	H	ØD1	ØD2	N
TUF-500-XX	11-13/16 [300.00]	6-1/2 [165.00]	6-57/64 [175.00]	4-59/64 [125.00]	45/64 [18.00]	4
TUF-650-XX	11-13/16 [300.00]	7-9/32 [185.00]	7-23/32 [196.00]	5-45/64 [145.00]	45/64 [18.00]	4
TUF-800-XX	13-25/32 [350.00]	7-7/8 [200.00]	8-1/2 [216.00]	6-19/64 [160.00]	45/64 [18.00]	8
TUF-1000-XX	13-25/32 [350.00]	8-21/32 [220.00]	9-11/64 [233.00]	7-3/32 [180.00]	45/64 [18.00]	8
TUF-1250-XX	13-25/32 [350.00]	9-27/32 [250.00]	10-25/64 [264.00]	8-17/64 [210.00]	45/64 [18.00]	8

The **SERIES TUF** Ultrasonic Energy Meter is a highly accurate and stable energy meter that utilizes ultrasonic technology to measure heating and cooling energy consumption. The Series TUF is a compact meter with a flowmeter and energy calculator in one, making it great for installation on chillers and boilers.

FEATURES/BENEFITS

- Lower maintenance costs with local parameter display and no moving parts
- Serial communication output allows for easy transfer of data
- Flow and temperature monitor in one unit eliminates the need for multiple units

APPLICATIONS

- Heat metering
- Utilities billing
- Tenant billing
- Monitoring of water heating or cooling: radiators, fan coils

INSTRUCTIONS FOR ORDERING

- Choose 1 ultrasonic energy meter model (includes 2 BSPP pipe fittings, 2 tightening nuts, 2 o-rings, and 1 thermowell with welding collar)
- Choose 1 pipe fitting model given the appropriate fitting size if NPT or BSPT connections are required (for DN15 to DN40 only)*

Example: TUF-150-MD, Fitting Size: A, select pipe fitting Model WM-ACC-C01 or WM-ACC-C11.

SPECIFICATIONS

Service: Clean, compatible liquids.	Pressure Limits: 232 psi (16 bar) for DN15 to DN40; 362 psi (25 bar) for >DN50.
Wetted Materials: Brass and 316L SS.	Pressure Drop: < 1.5 psi (10 kPa).
Range: See chart.	Process Connection: See chart.
Display: 8-digit LED.	Serial Communications: Modbus® RTU or BACnet® MSTP (selectable)**.
Accuracy: BTU: EN1434/CJ128 Class 2; Flow: ±(2+(0.02 Qp / Q))%; Temperature: ±0.1°C.	Enclosure Rating: IP65.
Power Requirements: 24 VDC or 3.6 V ER26500 lithium metal battery, user supplied and installed, battery acts as back-up if power is lost.	Enclosure Material: Plastic.
Power Consumption: 1 W.	Repeatability: Flowmeter: 1%.
Temperature Limits: Ambient: 41 to 131°F (5 to 55°C); Process: 36 to 203°F (2 to 95°C).	Electrical Connections: 3 ft (0.91 m) 4x0.2 mm2 cable with terminal block.
Humidity Limit: < 93%.	Flow Direction: Unidirectional.
	Mounting Orientation: Horizontal or vertical.
	Weight: See chart.
	Agency Approvals: CE.

**M-BUS available upon request.

MODEL CHART											
Ultrasonic Energy Meter Model	Body Size†	Pipe Size		Fitting Size	Communication	Meter Connection	GPM (LPM)			Weight lb (kg)	Price
		in	mm				Min Flow (Qi)	Nominal Flow Range (Qp)	Max Flow (Qs)		
TUF-150-MD	DN15	1/2	15	A	Modbus®	G-3/4	0.1 (0.5)	6.6 (25)	13 (50)	3.1 (1.4)	\$464.00
TUF-200-MD	DN20	3/4	20	B	Modbus®	G1	0.2 (0.8)	11 (42)	22 (83)	3.1 (1.4)	464.00
TUF-250-MD	DN25	1	25	C	Modbus®	G1-1/4	0.3 (1.2)	15 (58)	31 (117)	4.1 (1.8)	510.00
TUF-320-MD	DN32	1-1/4	32	D	Modbus®	G1-1/2	0.5 (2)	26 (100)	53 (200)	5.2 (2.3)	653.00
TUF-400-MD	DN40	1-1/2	40	E	Modbus®	G2	0.9 (3)	44 (167)	88 (333)	6.6 (3)	756.00
TUF-500-MD*	DN50	2	50	-	Modbus®	Flange	1.3 (5)	66 (250)	132 (500)	33 (15)	1722.00
TUF-650-MD	DN65	2-1/2	65	-	Modbus®	Flange	2.2 (8.3)	110 (417)	220 (833)	10.1 (4.6)	1850.00
TUF-800-MD	DN80	3	80	-	Modbus®	Flange	3.5 (13.3)	176 (667)	352 (1333)	13.5 (6.1)	2202.00
TUF-1000-MD	DN100	4	100	-	Modbus®	Flange	5.3 (20)	264 (1000)	528 (2000)	16.5 (7.5)	2648.00
TUF-1250-MD	DN125	5	125	-	Modbus®	Flange	8.8 (33)	440 (1667)	881 (3333)	21.1 (9.6)	3479.00
TUF-150-BN	DN15	1/2	15	A	BACnet	G-3/4	0.1 (0.5)	6.6 (25)	13 (50)	3.1 (1.4)	464.00
TUF-200-BN	DN20	3/4	20	B	BACnet	G2	0.2 (0.8)	11 (42)	22 (83)	3.1 (1.4)	464.00
TUF-250-BN	DN25	1	25	C	BACnet	G1-1/4	0.3 (1.2)	15 (58)	31 (117)	4.1 (1.8)	510.00
TUF-320-BN	DN32	1-1/4	32	D	BACnet	G1-1/2	0.5 (2)	26 (100)	53 (200)	5.2 (2.3)	653.00
TUF-400-BN	DN40	1-1/2	40	E	BACnet	G2	0.9 (3)	44 (167)	88 (333)	6.6 (3)	756.00
TUF-500-BN*	DN50	2	50	-	BACnet	Flange	1.3 (5)	66 (250)	132 (500)	33 (15)	1722.00
TUF-650-BN	DN65	2-1/2	65	-	BACnet	Flange	2.2 (8.3)	110 (417)	220 (833)	10.1 (4.6)	1850.00
TUF-800-BN	DN80	3	80	-	BACnet	Flange	3.5 (13.3)	176 (667)	352 (1333)	13.5 (6.1)	2202.00
TUF-1000-BN	DN100	4	100	-	BACnet	Flange	5.3 (20)	264 (1000)	528 (2000)	16.5 (7.5)	2648.00
TUF-1250-BN	DN125	5	125	-	BACnet	Flange	8.8 (33)	440 (1667)	881 (3333)	21.1 (9.6)	3479.00

*A pipe fitting is required to use the DN15 to DN40 energy meters. The DN50 has a flange connection and does not require a pipe fitting. †For additional sizes up to 8" (203.2 mm) contact factory.

MODEL CHART									
Fitting Size	Pipe Fitting Model*	Process Connection Size	Weight lb (kg)	Price	Fitting Size	Pipe Fitting Model*	Process Connection Size	Weight lb (kg)	Price
A	WM-ACC-C01	1/2" NPT	0.6 (0.3)	\$6.80	C	WM-ACC-C13	1" BSPT	1.8 (0.8)	20.50
A	WM-ACC-C11	1/2" BSPT	0.6 (0.3)	6.80	D	WM-ACC-C04	1-1/4" NPT	2.3 (1.1)	31.00
B	WM-ACC-C02	3/4" NPT	1.2 (0.5)	11.00	D	WM-ACC-C14	1-1/4" BSPT	2.3 (1.1)	31.00
B	WM-ACC-C12	3/4" BSPT	1.2 (0.5)	11.00	E	WM-ACC-C05	1-1/2" NPT	4.4 (2)	42.25
C	WM-ACC-C03	1" NPT	1.8 (0.8)	20.50	E	WM-ACC-C15	1-1/2" BSPT	4.4 (2)	42.25

*Each model includes 1 fitting.

Modbus® is a registered trademark of Schneider Automation, Inc.