


DIFFERENTIAL PRESSURE MODULE

Wireless, Measures Differential Pressure, Air Velocity, and Flow

CALIBRATION SERVICES AVAILABLE

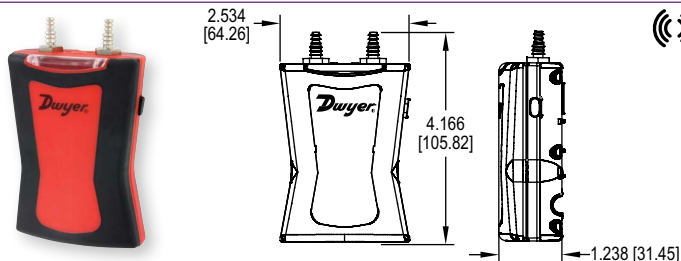

The **Series DP3 Wireless Differential Pressure Module** is a compact, highly accurate, auto-ranging differential pressure module ideal for low flow applications. The Series DP3 is used in conjunction with the Dwyer Mobile Meter® application software to view pressure drop across filters, static pressure in ducts, and velocity pressures from pitot tubes or air flow stations.

BENEFITS/FEATURES

- Auto ranging technology maintains optimal performance down to 0.1 in w.c.
- LED indicator displays module status, connection, charging and logging to the user
- Over-the-air updates ensure the module has the latest firmware
- Unit can be mounted on both the pitot and velocity grid
- Rechargeable battery allows for a 10 hour battery life
- One button design allows for easy operation and simple logging
- Rugged case allows for a 10' drop without compromising functionality
- Automatically corrects pressure reading depending on the inclination of the module

APPLICATIONS

- Building commissioning
- Building HVAC test and balance
- Critical environment testing
- Industrial process verification
- Instrumentation validation

USA: California Proposition 65

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SPECIFICATIONS

Service: Non-corrosive dry gases.	Power Requirements: 3.7 V lithium ion battery, user rechargeable.
Wetted Materials: Zinc plated brass; Silicon.	Wireless Distance: 50' (15 m).
Accuracy: ±0.5% FS span @ 25°C (includes non linearity, hysteresis, and non repeatability).	Weight: 3.3 oz (93.55 g).
Pressure Limits: ±10 in w.c. (±2.5 kPa).	Electrical Connections: Female mini-USB.
Temperature Limits: Operating: -4 to 140°F (-20 to 60°C); Storage: -40 to 185°F (-40 to 85°C).	Hose Connections: Two barbed connections for use with 1/8" (3.18 mm) or 3/16" (4.76 mm) ID tubing.
	Approvals: CE, FCC.

MODEL CHART

Model	Range	Maximum Pressure
DP3	±10 in w.c. (±2.5 kPa)	10 psi (68.9 kPa)

OPTIONS

Model	Description
-NIST	NIST traceable calibration certificate

