


PORT CONNECTION	DIM A	DIM B	DIM C	ACTUATOR DIAMETER	Cv
1/2 NPT	2-9/16	5-43/64	4-7/8	1-3/4	4.9
1/2 NPT	2-9/16	7-9/16	6-47/64	2-1/2	4.9
3/4 NPT	2-61/64	6-7/64	4-31/32	1-3/4	9.1
3/4 NPT	2-61/64	7-51/64	6-15/16	2-1/2	9.1
1 NPT	3-35/64	8-23/64	7-19/64	2-1/2	21.7
1 NPT	3-35/64	8-25/32	7-23/32	3-9/16	21.7
1-1/4 NPT	4-11/32	8-55/64	7-39/64	2-1/2	31.5
1-1/4 NPT	4-11/32	9-7/32	4-61/64	3-9/16	31.5
1-1/2 NPT	4-47/64	9-1/16	7-51/64	2-1/2	49.0
1-1/2 NPT	4-47/64	9-27/64	8-5/32	3-9/16	49.0
2 NPT	5-29/32	9-49/64	8-5/32	2-1/2	60.1
2 NPT	5-29/32	10-1/8	8-33/64	3-9/16	60.1

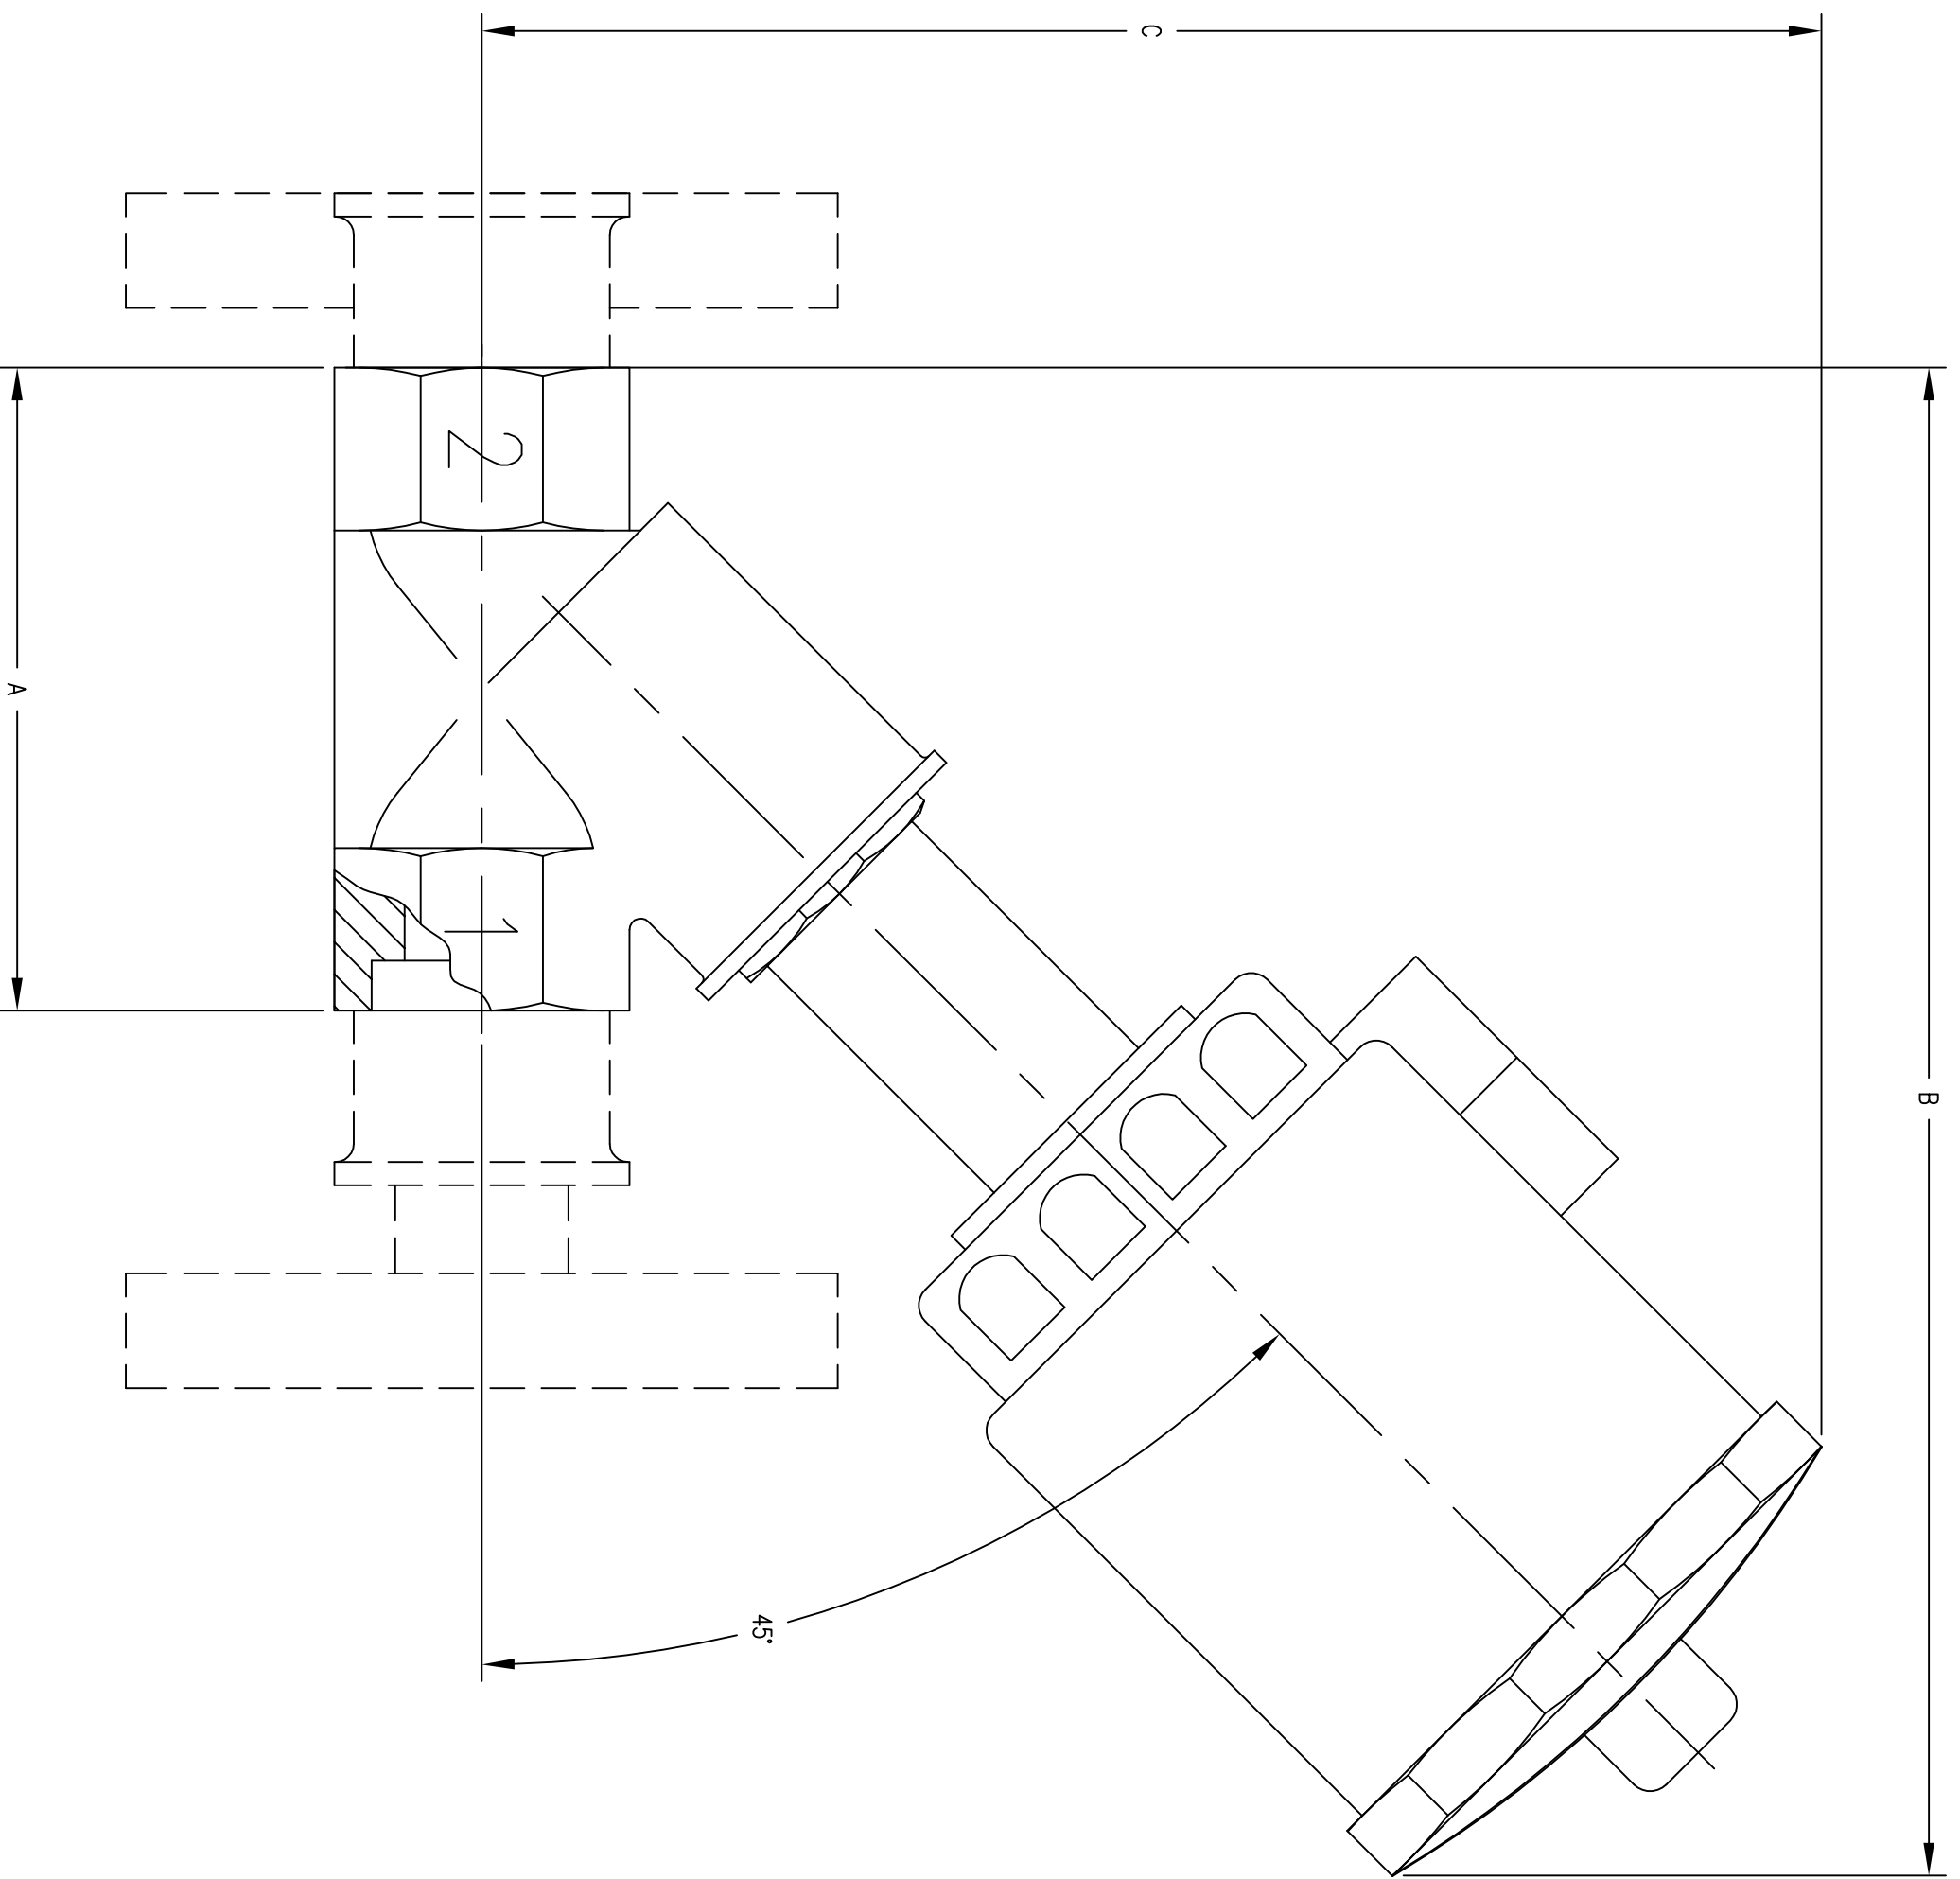

Ⓢ = CRITICAL DIMENSION
 STANDARD TOLERANCES UNLESS NOTED:
 ALL DECIMAL DIMENSIONS ± .005
 ALL ANGLES ± 1°

SCALE 1:1

NO.	CHANGES	BY/DATE	DATE	NAME	MATERIAL
			DATE	NAME	
			DWN BY	SAV-ST SERIES	FINISH
			CHKD	ANGLE SEAT VALVE	
			APPD	STAINLESS STEEL NPT	FR. NO.
NOTICE: The drawing and the principles of design embodied therein are the exclusive property of DWYER INSTRUMENTS, INC. and are made available for examination without the written consent of said corporation.					DWYER INSTRUMENTS, INC. MICHIGAN CITY, INDIANA 46360 U.S.A.
ACAD2002 3					