


EXPLOSION-PROOF DIFFERENTIAL PRESSURE TRANSMITTER

HART®, Push-Button Configuration, Rangeability (100:1)

CALIBRATION SERVICES AVAILABLE

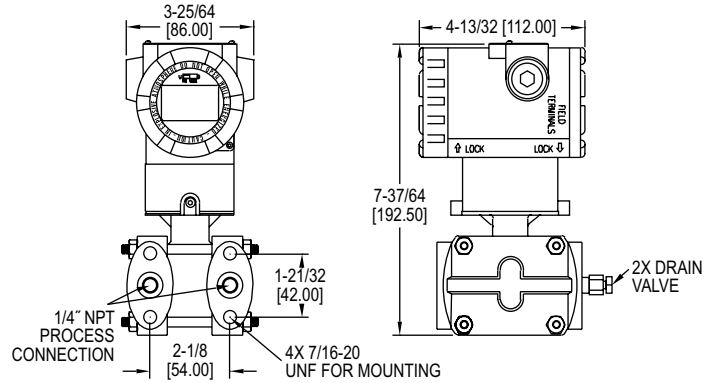

Mercoid® Series 3100D Explosion-Proof Smart Pressure Transmitter is a microprocessor-based high performance transmitter, which has flexible pressure calibration, push-button configuration, and programmable using HART® Communication. The Series 3100D is capable of being configured for differential pressure or level applications with the zero and span buttons. A field calibrator is not required for configuration. The transmitter software compensates for thermal effects, improving performance. EEPROM stores configuration settings and stores sensor correction coefficients in the event of shutdowns or power loss. The Series 3100D is FM approved for use in hazardous (classified) locations. The 100:1 rangeability allows the smart transmitter to be configured to fit any application.

BENEFITS/FEATURES

- Configurable using zero/span buttons means no calibrator required reducing time to install and running
- Range-ability and selectable engineering units, allows transmitter to fit many applications reducing the number of different transmitters to meet specifications
- High accuracy (±0.075%) provides exceptional measurement for ensuring tight-control and minimizing costly out of specification conditions
- Automatic sensor temperature compensation improves performance of device for accurate measurement under different operating environments
- Fail-mode process function stores configuration settings in the event of shutdown or power-loss provides for faster restart to getting application back on-line
- A HART® Communication programmable device provides a reliable, long-term solution for plant operators who seek the benefits of intelligent devices with digital communication

APPLICATIONS

- Flow measurement
- Level monitoring
- Filter or pump differential pressure
- Critical process monitoring

SPECIFICATIONS

Service: Compatible gases, steam, liquids or vapors.
Wetted Materials: 316L SS, fluoroelastomer.
Accuracy: ±0.075% FS (@ 20°C).
Rangeability: 100:1 turn down (0 to 6 in w.c. range is 20:1 turn down).
Stability: ±0.125% FSO/yr.
Temperature Limits: Process: -40 to 248°F (-40 to 120°C); Ambient: Without LCD: -40 to 185°F (-40 to 85°C); With LCD: -22 to 176°F (-30 to 80°C).
Pressure Limits: Max pressure: Range: -14.5 to 2000 psi; Burst pressure: 10000 psi.
Thermal Effect: ±0.125% span/32°C.
Power Requirements: 11.9-45 VDC.
Output Signal: 4-20 mA / HART® Communication.
Response Time: 0.12 s.
Damping Time: 0.25 to 60 s.
Loop Resistance: Operation: 0 to 1500 Ω; HART® Communication: 250 to 500 Ω.
Electrical Connection: Two 1/2" female NPT conduit, screw terminal.
Process Connection: 1/4" female NPT.
Display: Optional 5 digit LCD.
Enclosure Rating: NEMA 4X (IP66) and explosion-proof for Class I, Div I, Groups A, B, C and D.
Weight: 8.6 lb (3.9 kg).
Compliance: CE, FM.

MODEL CHART

| Model | Calibrated Span (Min. to Max.) | | Lower Range Limit | | Upper Range Limit | | LCD Display |
|--------------------|--------------------------------|--------------------|-------------------|------------|-------------------|-----------|-------------|
| 3100D-2-FM-1-1 | 0.6 to 30 in w.c. | 0.15 to 7.5 kPa | -30 in w.c. | -7.5 kPa | 30 in w.c. | 7.5 kPa | No |
| 3100D-3-FM-1-1 | 1.5 to 150 in w.c. | 0.373 to 37.3 kPa | -150 in w.c. | -37.3 kPa | 150 in w.c. | 37.3 kPa | No |
| 3100D-4-FM-1-1 | 7.5 to 750 in w.c. | 1.865 to 186.5 kPa | -750 in w.c. | -186.5 kPa | 750 in w.c. | 186.5 kPa | No |
| 3100D-5-FM-1-1 | 1 to 100 psi | 6.9 to 690 kPa | -100 psi | -690 kPa | 100 psi | 690 kPa | No |
| 3100D-6-FM-1-1 | 3 to 300 psi | 20.68 to 2068 kPa | -300 psi | -2068 kPa | 300 psi | 2068 kPa | No |
| 3100D-2-FM-1-1-LCD | 0.6 to 30 in w.c. | 0.15 to 7.5 kPa | -30 in w.c. | -7.5 kPa | 30 in w.c. | 7.5 kPa | Yes |
| 3100D-3-FM-1-1-LCD | 1.5 to 150 in w.c. | 0.373 to 37.3 kPa | -150 in w.c. | -37.3 kPa | 150 in w.c. | 37.3 kPa | Yes |
| 3100D-4-FM-1-1-LCD | 7.5 to 750 in w.c. | 1.865 to 186.5 kPa | -750 in w.c. | -186.5 kPa | 750 in w.c. | 186.5 kPa | Yes |
| 3100D-5-FM-1-1-LCD | 1 to 100 psi | 6.9 to 690 kPa | -100 psi | -690 kPa | 100 psi | 690 kPa | Yes |
| 3100D-6-FM-1-1-LCD | 3 to 300 psi | 20.68 to 2068 kPa | -300 psi | -2068 kPa | 300 psi | 2068 kPa | Yes |

Note: Consult factory for custom calibration.

EXPLOSION-PROOF DIFFERENTIAL PRESSURE TRANSMITTER

HART®, Push-Button Configuration, Rangeability (100:1)

CALIBRATION SERVICES AVAILABLE

PRESSURE

| MODEL CHART | | | | | | | | | | | | | | | |
|----------------------------|-------|---------------------------------|----------|--------|----|--|----------|----------------------------------|----------------------|------------------|---|-----|-----|--------------------------|--|
| Example | 3100D | -2 | -FM | -3 | -1 | -LEC | S2 | A1 | 05 | S | 2 | -05 | -10 | -LCD | 3100D-2-FM-3-1-LECS2A105S2-05-10-LCD |
| Series | 3100D | | | | | | | | | | | | | | Explosion-proof differential pressure transmitter |
| Range | | 1 2 3 4 5 6 7 | | | | | | | | | | | | | 0 to 6 in w.c. 0 to 30 in w.c. 0 to 150 in w.c. 0 to 750 in w.c. 0 to 100 psi 0 to 300 psi 0 to 1000 psi |
| Approval | | | FM WP | | | | | | | | | | | | FM approved Weatherproof only (only available with 316 SS housing) |
| Process Connection | | | | 1 3 | | | | | | | | | | | 1/4" female NPT Diaphragm seal |
| Electrical Connection | | | | | 1 | | | | | | | | | | 1/2" female NPT |
| Diaphragm Seal Type | | | | | | LEC LED LEH LEL LFC LFD LFH LFL | | | | | | | | | 2 extended diaphragm seals capillary type 1 extended diaphragm seal direct mount high side 1 extended diaphragm seal capillary type high side 1 extended diaphragm seal capillary type low side 2 flush diaphragm seals capillary type 1 flush diaphragm seal direct mount high side 1 flush diaphragm seal capillary type high side 1 flush diaphragm seal capillary type low side |
| Mounting Flange | | | | | | | S2 S3 | | | | | | | | 2" (50 mm) 316L SS 3" (80 mm) 316L SS |
| Mounting Flange Rating | | | | | | | | A1 A2 D1 D2 J1 J2 | | | | | | | ANSI class 150# ANSI class 300# DIN PN 10/16 DIN PN 25/40 JIS 10 K JIS 20 K |
| Extension Length | | | | | | | | | 00 05 10 15 | | | | | | No extension [standard for flush mount] 2" extension 4" extension 6" extension |
| Diaphragm Material | | | | | | | | | | S P H T | | | | | 316L SS diaphragm PTFE and 316L SS diaphragm Hastelloy C-276 diaphragm Tantalum diaphragm |
| Fill Fluid | | | | | | | | | | | 2 | | | | Silicon oil (-40 to 400°F) |
| Capillary Length High Side | | | | | | | | | | | | XX | | | 0 to 20 feet |
| Capillary Length Low Side | | | | | | | | | | | | | XX | | 0 to 20 feet |
| Options | | | | | | | | | | | | | | CC LCD NIST SSH | Custom calibration 5 digit LCD NIST calibration 316 SS housing (Only available with WP approval) |

| CUSTOM CALIBRATION VALUES | |
|---------------------------|---|
| Primary Units | in w.c., ft in w.c., mm in w.c., in Hg, psig, g/cm ² , kg/cm ² , MPa, Pa, kPa, bar, mbar, Torr, Atm, mm Hg |
| Upper Range Limit | 20 mA value |
| Lower Range Limit | 4 mA value |
| Output | Linear or square root |
| Damping Time | 0 to 60 seconds |
| Display Mode | Unit, %, mA, rotate |
| Display Units | Primary unit or Engineering unit |
| Engineering Units* | Volumetric Flow Units US gal/s, US gpm, US gal/hr, US gpd, imp gal/s, imp gpm, imp gal/hr, imp gpd, l/s, l/min, l/hour, ft/s, m/s, metric gal/day, metric l/day, ft ³ /s, ft ³ /min, ft ³ /h, ft ³ /day, m ³ /s, m ³ /min, m ³ /hr, m ³ /day, normal l/hr, normal m ³ /hr, standard ft ³ /min, barrels/s, barrels/min, barrels/hr, barrels/day Mass Flow Units g/s, g/min, g/hr, kg/s, kg/min, kg/hr, kg/day, metric ton/min, metric ton/hour, metric ton/day, lb/s, lb/min, lb/hr, lb/day, short ton/min, short ton/hr, short ton/day, long ton/hr, long ton/day Volume Units gallons, liters, imp gallons, m ³ , barrels, bushels, yd ³ , ft ³ , in ³ , bbl liq, normal cubic meter, normal liter, standard cubic feet, hectoliters |
| Engr. Upper Range Limit* | Engr. upper value |
| Engr. Lower Range Limit* | Engr. lower value |
| Engr Function* | Linear or square root |

*Engineering Units, Engr. Upper Range Limit, Engr. Lower Range Limit and Engr. Function values are only required if engineering unit is selected.

| ACCESSORIES | |
|-------------|--|
| Model | Description |
| A-630 | Stainless steel angle type bracket with SS bolts |
| A-631 | Stainless steel flat type bracket with SS bolts |
| BBV-1F | Flanged 3-valve block manifold |
| BBV-22F | Flanged 5-valve block manifold |
| DevCom2000 | HART® communication protocol software |

HART® is a registered trademark of Fieldcomm Group, Inc.

Differential Pressure Transmitters, Liquid & Gas