



## MPERATURE SENSOR ASSEMBLIES WITH THERMOWELLS

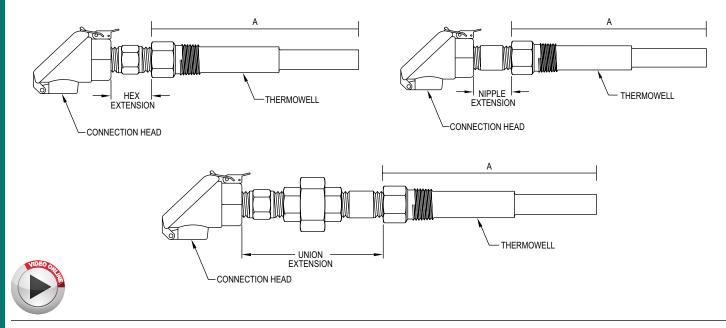

Series T Temperature Sensor Assemblies with Thermowells are available in a variety of head styles and thermowell materials. All elements are spring loaded to ensure positive contact in the thermowell. Thermowells are non-lagging. The sensor sheath material is constructed of 316 SS regardless of the well material specified.

## MODEL CODING

Fill in the appropriate numbers or letters to specify the probe of your choice. Fill in all boxes. If an item or dimension does not apply, fill those boxes with zeros '0'.

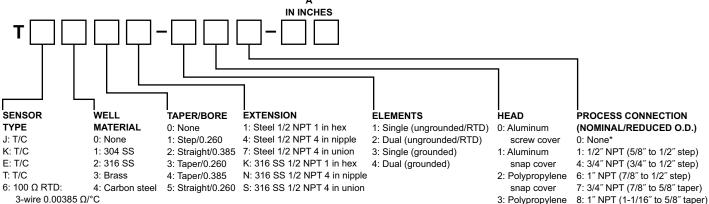

1000 Ω RTD:

3-wire 0.00385 Ω/°C

4: 100 Ω RTD:

3-wire 0.00392 Ω/°C

- screw cover
- 5: 304 SS screw cover
- B: 1/2" NPT (5/8" straight) E: 3/4" NPT (3/4" straight) D: 1" NPT (7/8" straight)

9: 3/4" NPT (7/8" to 49/64" taper)

A: 1" NPT (1-1/16" to 49/64" taper)

\*For replacement sensors, specify "0" for well material, taper and bore, and process connections.

USA: California Proposition 65

WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.